
Strobe Speaker Installation Guide


Please read carefully before you do the installation.

Installation Way 1: Back Plate for Wall&Ceiling

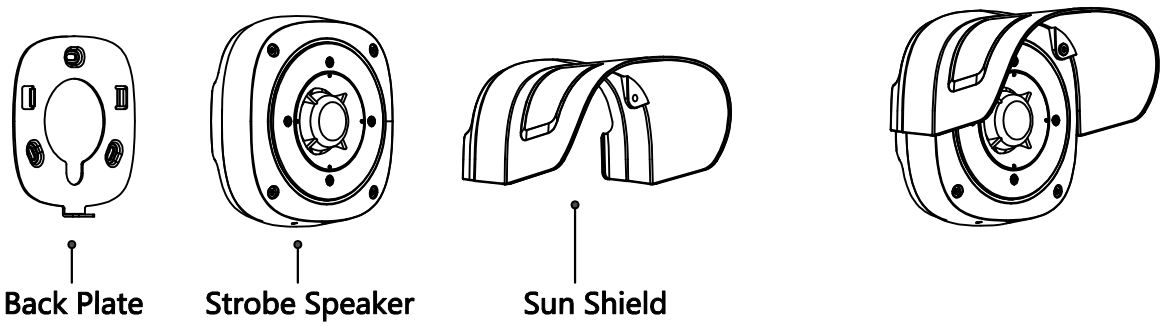


Steps


1. Drill 3 holes on the wall according to the back plate hole patterns.
   Hole Diameter: 6 mm, Hole Depth: 30 mm.

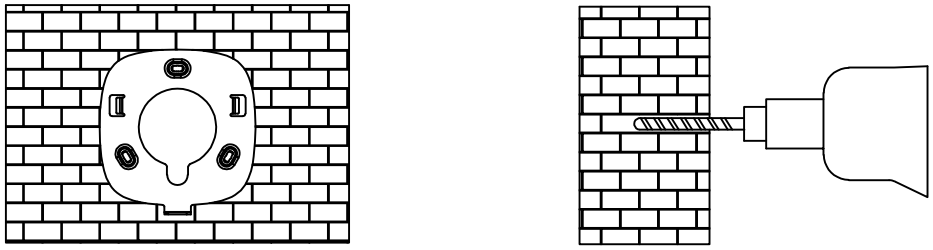


2. Drive 3 pieces of M4×30 mm plastic expansion anchors into the wall.

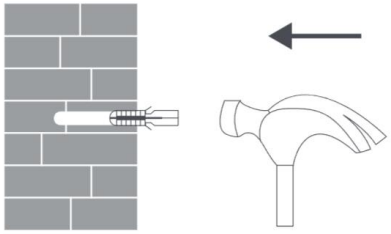

3. Attach the back plate to the wall, insert 3 pieces of M4×30 mm screws through the holes, and tighten them into the expansion anchors on the wall.

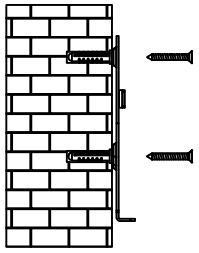


Wall Mount

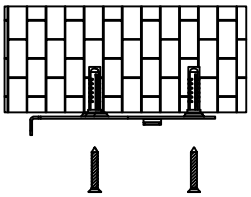


Ceiling Mount

4. Secure the strobe speaker to the back plate and tighten with M4×10 mm screws. If a sun shield is required, replace the screws with M4×35 mm ones.

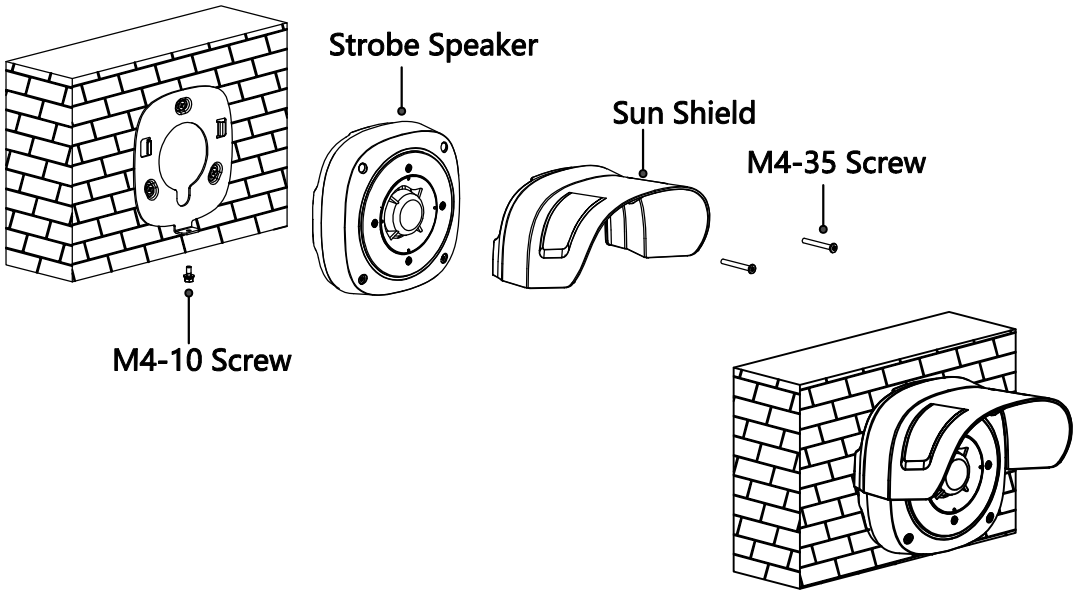


Installation Way 2: Junction Box Wall Mounting

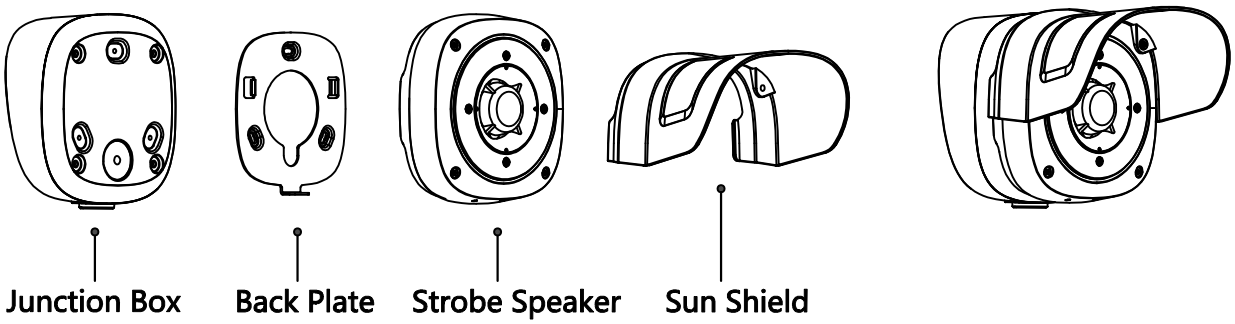


Steps


1. Follow the drill template on the sticker and drill 4 holes in the wall . Hole Diameter: 6 mm, Hole Depth: 40 mm.

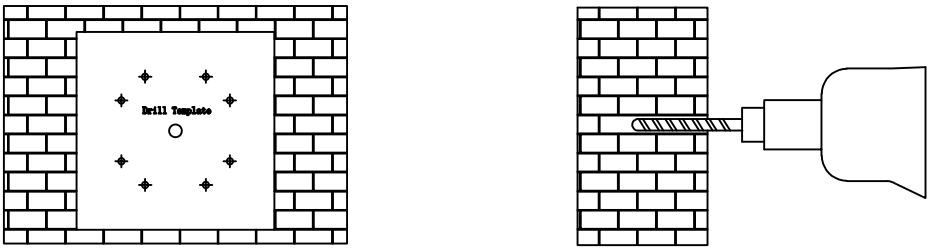


2. Drive 4 pieces of M4×40 mm plastic expansion anchors into the wall.

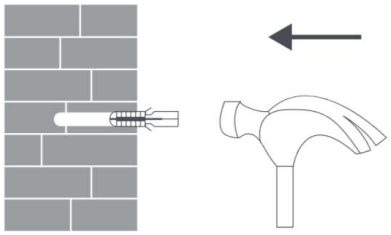


3. Mount the junction box to the wall, and secure it with 4 pieces of M4×40 mm screws into the expansion anchors.

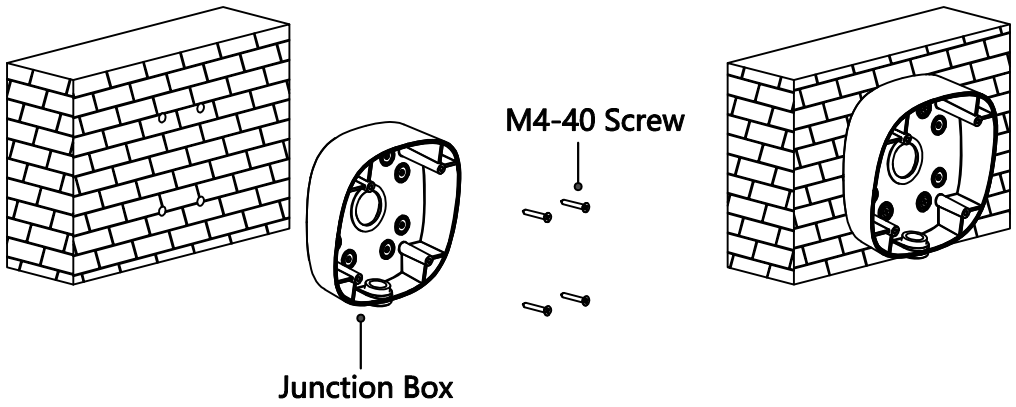

4. Thread the strobe speaker harness through back plate & junction box cover grommets, tuck into junction box. Secure with M4×8 mm screws, fasten back plate base with M4×10 mm screws. Replace with M4×35 mm screws for sun shield.

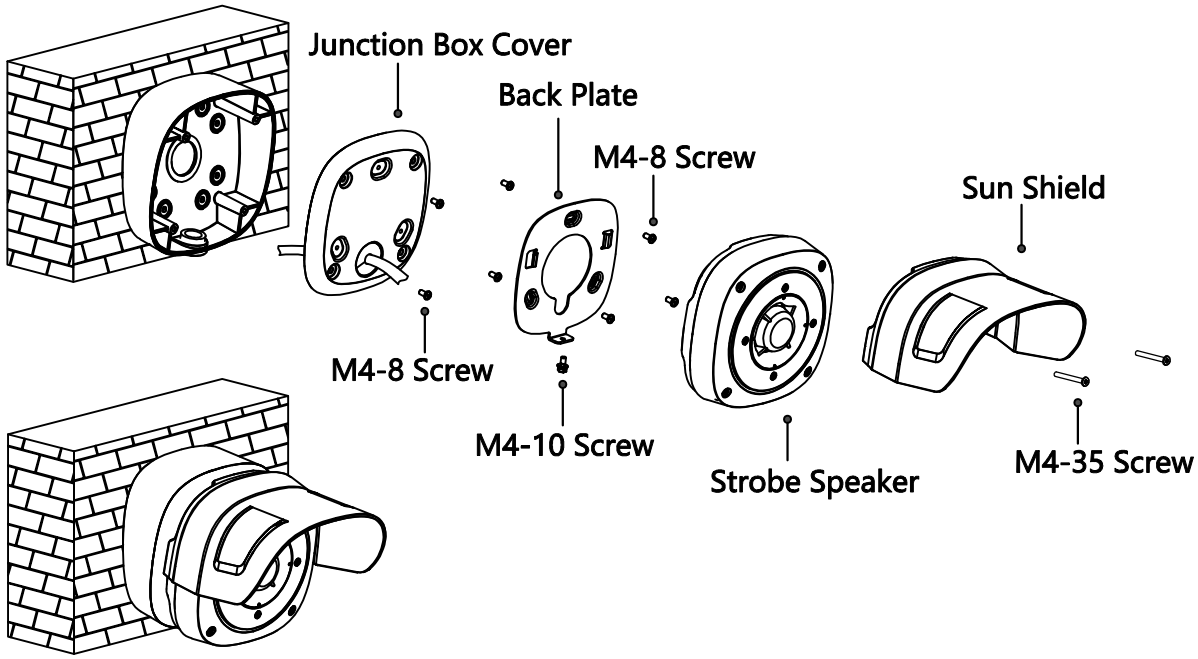

Installation Way 3: Universal Wall Mount

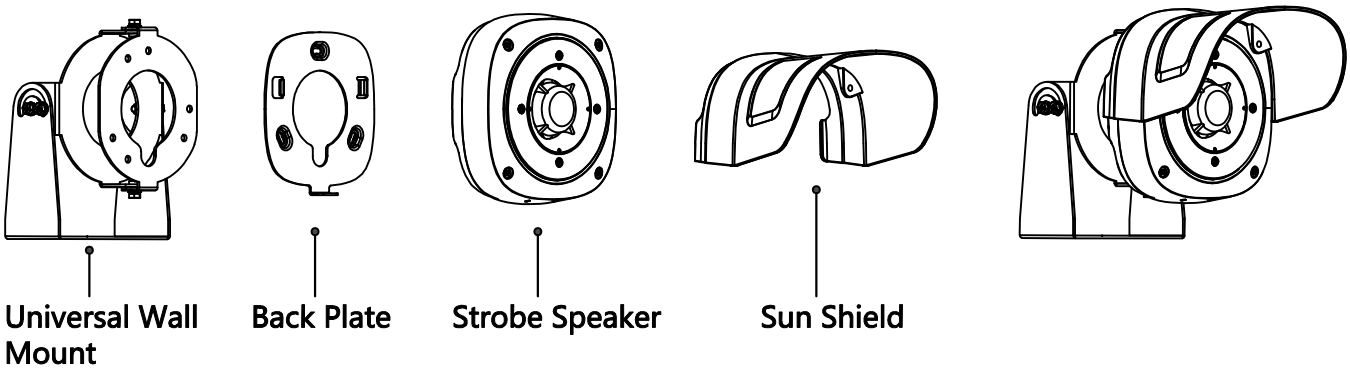

Steps

1. Secure the universal wall mount to the enclosure with M6×12 mm screws. Then attach the back plate and strobe speaker in sequence with M4×8 mm and M4×10 mm screws. Replace with M4×35 mm screws if a sun shield is required.

